


PRODUCT ORDERING GUIDE

Eliminator Series ST

STAINLESS STEEL

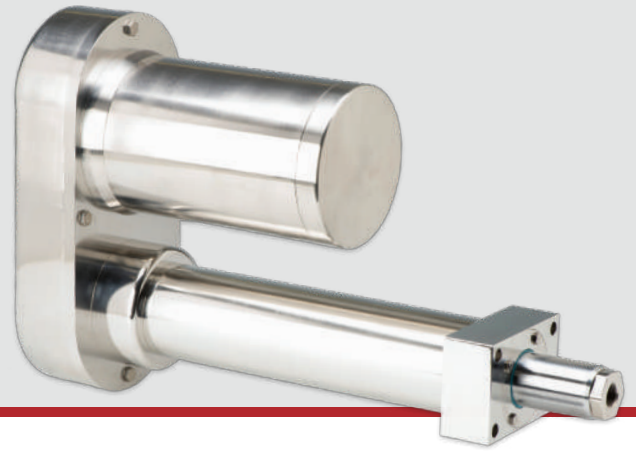

Custom products are available.

Contact sales@edriveactuators.com with your requirements.

BASE NUMBER		OPTIONS				SPECIAL															
S	T																				
Base No. (Capacity)		Unit Mounting Option		Motor Position		Custom Length (in)		Precision/Lead Accuracy***		Std. Stroke Length*		Rod End Option		Gearbelt Reduction		Switch Type		N.C. Switch Qty		N.O. Switch Qty	
ST201 (1,000 lbf)		MB: Bottom Mount		1, 2, 3, 4		00.00		A: .002 in/ft Zero Backlash		06: 6 in.		E: Female Eye		00: In-Line/Direct Coupled		A: Hall Sourcing PNP		0, 1, 2, 3, etc.			
ST302 (2,000 lbf)		FF: Front Flange		0 = In-Line				B: .0005 in/ft Zero Backlash		12: 12 in.		F: Female Thread		10: 1:1		B: Hall Sinking NPN					
ST304 (4,000 lbf)		MF: Foot Mount						X: Standard		18: 18 in.		A: Self-Aligning Coupler**		20: 2:1		C: Reed					
ST404 (4,000 lbf)		TF: Front Trunnion								24: 24 in.		M: Male Thread				X: No Switches					
ST406 (6,000 lbf)										30: 30 in.		S: Spherical Rod Eye									
ST508 (8,000 lbf)										36: 36 in.											
ST516 (16,000 lbf)										42: 42 in.											
ST618 (18,000 lbf)										48: 48 in.											
ST625 (25,000 lbf)																					
		Configuration																			
		L: In-Line																			
		U: Parallel Offset																			

* ST201 is available with stroke lengths up to 12 in.
 ST302 – ST304 are available with stroke lengths up to 36 in.
 ST404 – ST406 are available with stroke lengths up to 42 in.
 ST508 – ST625 are available with stroke lengths up to 48 in.
 ** Self-Aligning Coupler is not available for ST625
 *** ST201 – Std. Precision/Lead Accuracy is 0.0005 in/ft, Zero Backlash
 *** ST302, ST404 – Zero Backlash not available

For applications support contact us today.

sales@edriveactuators.com

FB6101