


THIS PRINT IS THE PROPERTY OF E-DRIVE DESIGN, INC. AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH E-DRIVE DESIGN, INC. RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR MANUFACTURE AND/OR SALE. THE PRINT OR THE ARTICLE SHOWN HEREON MAY NOT BE REPRODUCED.

- NOTES:
1. USE MOBIL MIST LUBE #24;
  2. 150 S.U.S. VISCOCITY @ 100° F.
  3. OIL LINES TO BE 1/4" TUBING.
  4. LINES TO BE APPROXIMATELY EQUAL IN LENGTH WHEN LUBRICATING MORE THAN ONE ACTUATOR..
  5. EACH ACTUATOR MUST RECEIVE 1-1/2 DROPS PER MINUTE.
  6. REF. 1 DROP = .003 CUBIC INCHES.
  7. FOR START-UP AND ADJUSTMENTS SEE LUBRICATORS MANUFACTURERS INSTRUCTIONS.
- \* 7. 10:1 RATIO AT LUBRICATOR

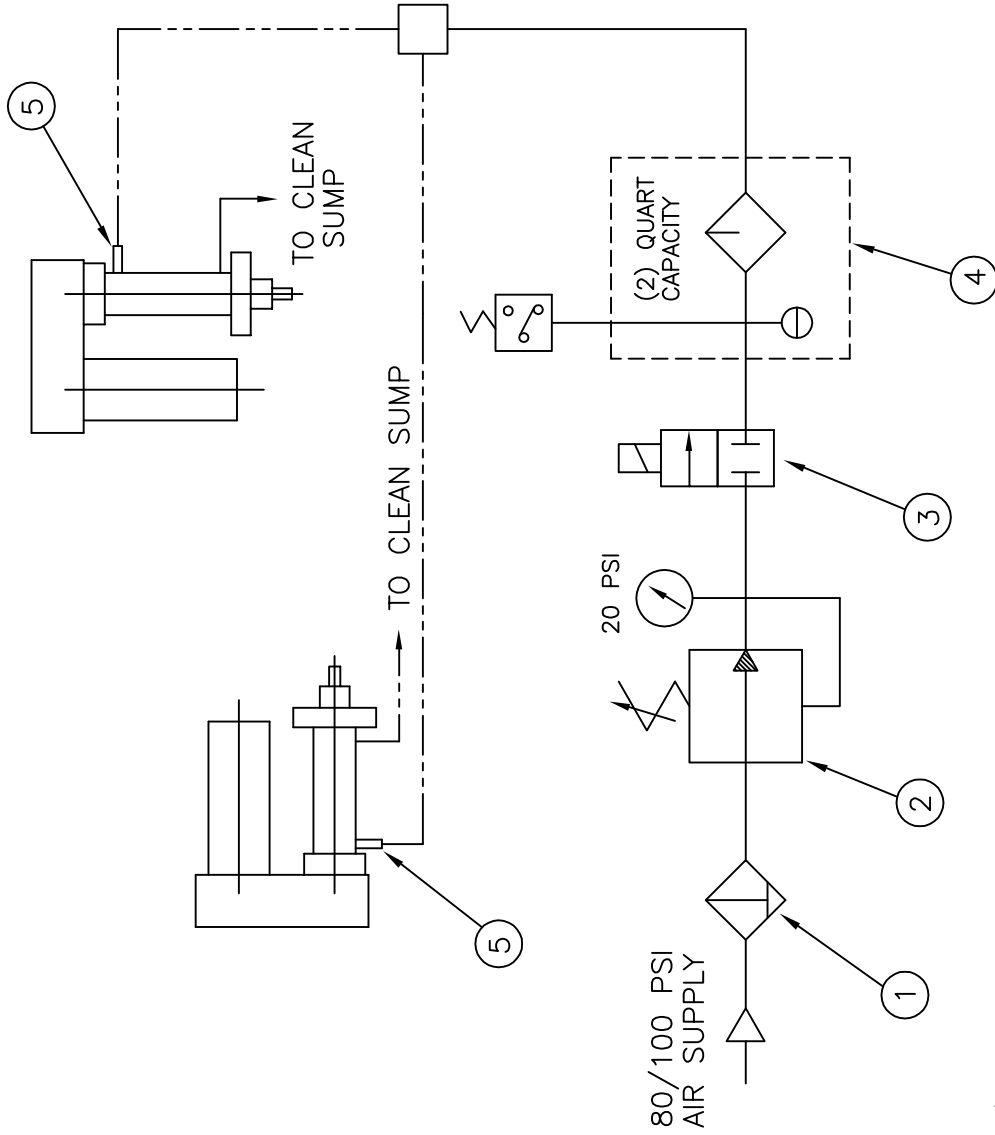

\* EXAMPLE: 15 DROPS AT LUBE FOR 1-1/2 DROPS AT ACTUATOR.

5	AS REQD	RECLASSIFIER	NORGREN 18-009-014
4	1	LUBRICATOR w/SWITCH	NORGREN 10-015-005-3A
3	1	SOLENOID	ALCON U21-44-21-12
2	1	REGULATOR	NORGREN R73G-2AK-RFG
1	1	FILTER	NORGREN F73G-2AN-AT2
ITEM	QTY	NAME	SPECIFICATION

**E-DRIVE Design, Inc.**

E-DRIVE Design, Inc. • 120 Vanderbilt Avenue • West Hartford, Connecticut

SCALE NONE

DATE 9-84

DRAWING NAME

MATL: DRAWN BY SM

LUBRICATION DIAGRAM

FOR

AMBIENT TEMPERATURE'S < 110° F

A

JLP

1-99

UPDATED P/N'S

DATE

BY

REV.

CHANGE

DRAWING NUMBER

B-251A