


PRODUCT ORDERING GUIDE


Eliminator Series HDL

WITH LOAD CELL

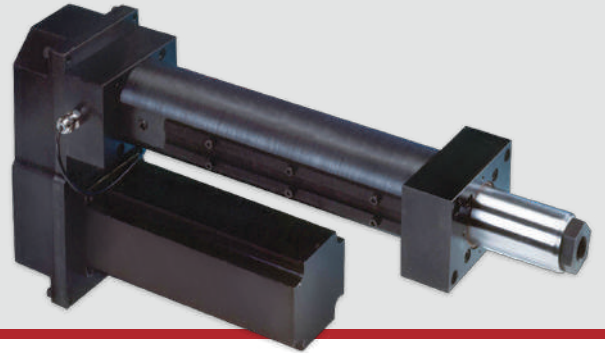

Custom products are available.

Contact sales@edriveactuators.com with your requirements.

BASE NUMBER				OPTIONS				SPECIAL											
H	D	L																	
Base No. (Capacity) HDL201 (1,000 lbf) HDL302 (2,000 lbf) HDL304 (4,000 lbf) HDL404 (4,000 lbf) HDL406 (6,000 lbf) HDL508 (8,000 lbf) HDL516 (16,000 lbf) HDL618 (18,000 lbf) HDL625 (25,000 lbf)				Unit Mounting Option MB: Bottom Mount FF: Front Flange MF: Foot Mount TF: Front Trunnion Rod End Option E: Female Eye F: Female Thread A: Self-Aligning Coupler M: Male Thread S: Spherical Rod Eye Configuration L: In-Line U: Parallel Offset				Motor Position 1, 2, 3, 4 0 = In-Line  Gearbelt Reduction 00: In-Line/Direct Coupled 10: 1:1 20: 2:1 Switch Type A: Hall Sourcing PNP B: Hall Sinking NPN C: Reed D: Switch Tracks / No Switches X: Solid Cover / No Switches				Custom Length (in) 00.00 Precision/Lead Accuracy** C: .0005 in/ft .003 in. Backlash X: Standard N.C. Switch Qty 0, 1, 2, 3, etc. N.O. Switch Qty 0, 1, 2, 3, etc.							
Std. Stroke Length* 06: 6 in. 12: 12 in. 18: 18 in. 24: 24 in. 30: 30 in. 36: 36 in. 42: 42 in. 48: 48 in.																			

* HDL201 is available with stroke lengths up to 12 in.

HDL302 – HDL304 are available with stroke lengths up to 36 in.

HDL404 – HDL406 are available with stroke lengths up to 42 in.

HDL508 – HDL625 are available with stroke lengths up to 48 in.

** HDL201 – Std. Precision/Lead Accuracy is 0.0005 in/ft, .003 in..Backlash

For applications support contact us today.

sales@edriveactuators.com

FB6138

EDrive Actuators, Inc.

385 Stamm Rd.

Newington, CT 06111

Website: edriveactuators.com

Phone: 1.860.953.0588

Fax: 1.860.953.0496

© 2020 all rights reserved