


PRODUCT ORDERING GUIDE


Eliminator Series SSL

SUPER SPEED WITH LOAD CELL

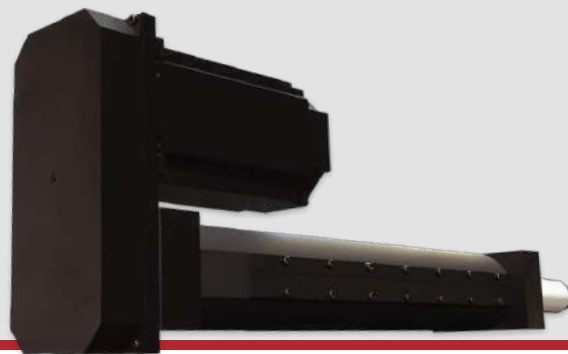

Custom products are available.

Contact sales@edriveactuators.com with your requirements.

BASE NUMBER										OPTIONS										SPECIAL			
S	S	L	4	5	4	-			-			-			-			-					
Base No. (Capacity)					Unit Mounting Option		Motor Position		Custom Length (in)		Std. Stroke Length		Rod End Option		Gearbelt Reduction		N.C. Switch Qty		N.O. Switch Qty				
SSL454 (2,000 lbf)					MB: Bottom Mount FF: Front Flange MF: Foot Mount TF: Front Trunnion		1, 2, 3, 4 0 = In-Line 		00.00		12: 12 in. 18: 18 in. 24: 24 in. 30: 30 in. 36: 36 in. 42: 42 in. 48: 48 in.		E: Female Eye F: Female Thread A: Self-Aligning Coupler M: Male Thread S: Spherical Rod Eye		00: In-Line/Direct Coupled 10: 1:1 20: 2:1		0, 1, 2, 3, etc.		0, 1, 2, 3, etc.				
					Configuration		Switch Type																
					L: In-Line U: Parallel Offset		A: Hall Sourcing PNP B: Hall Sinking NPN C: Reed D: Switch Tracks Only / No Switches X: Solid Cover / No Switches																

For applications support contact us today.

sales@edriveactuators.com

FB6153

EDrive Actuators, Inc.
 385 Stamm Rd.
 Newington, CT 06111

Website: edriveactuators.com
 Phone: 1.860.953.0588
 Fax: 1.860.953.0496

© 2019 all rights reserved